

Figure 1. HSRP with 4 participating routers in Normal mode

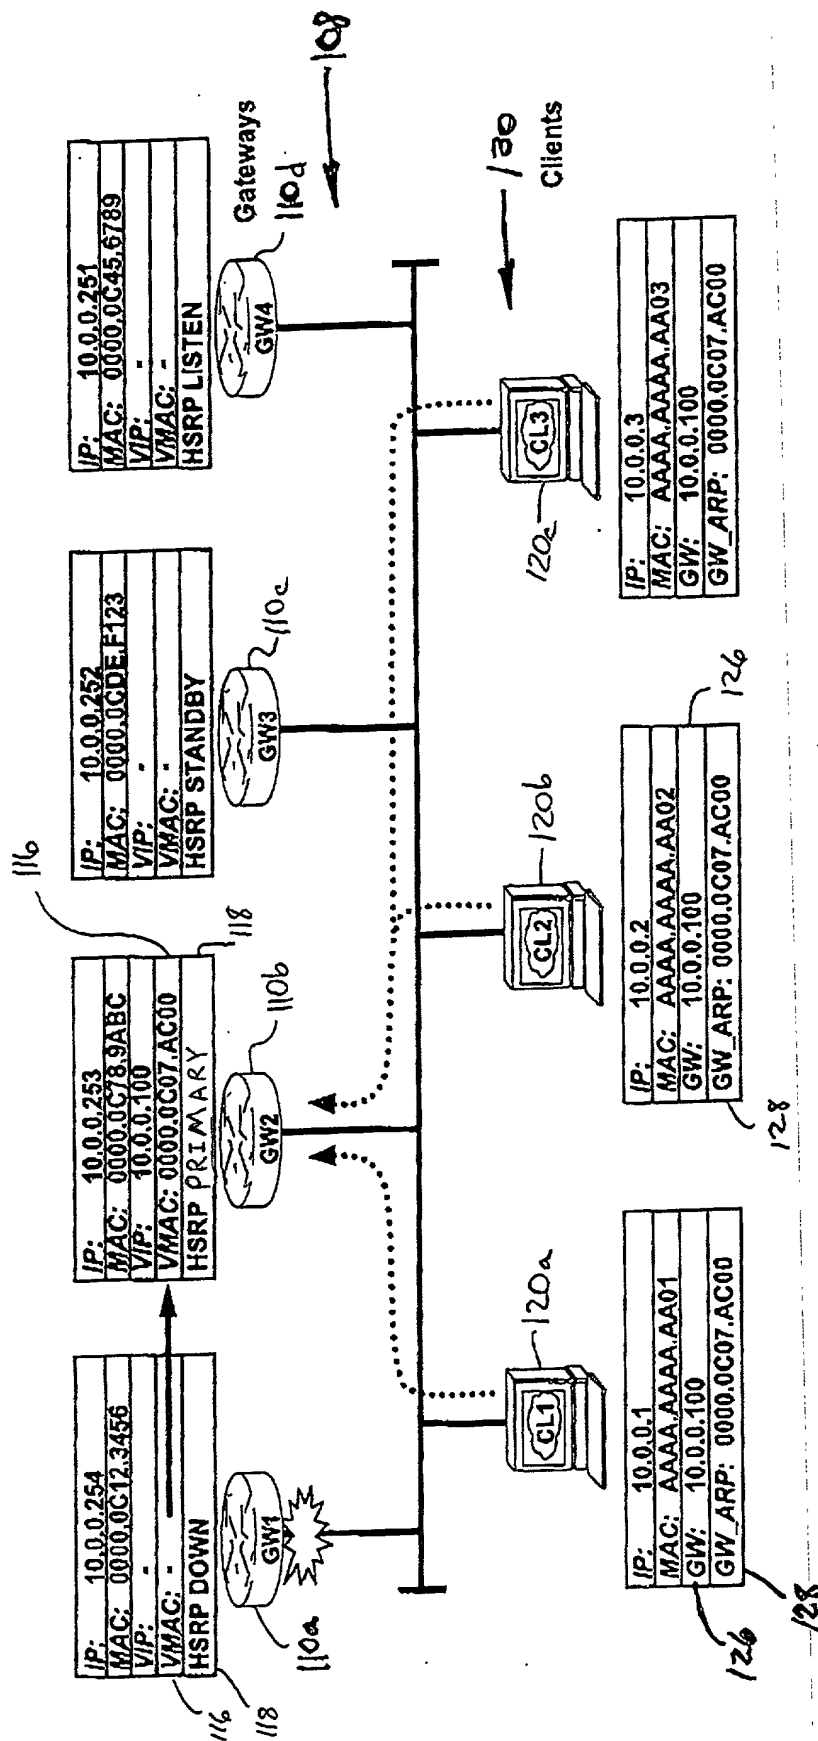


Figure 2. HSRP with 4 participating routers in Failover mode

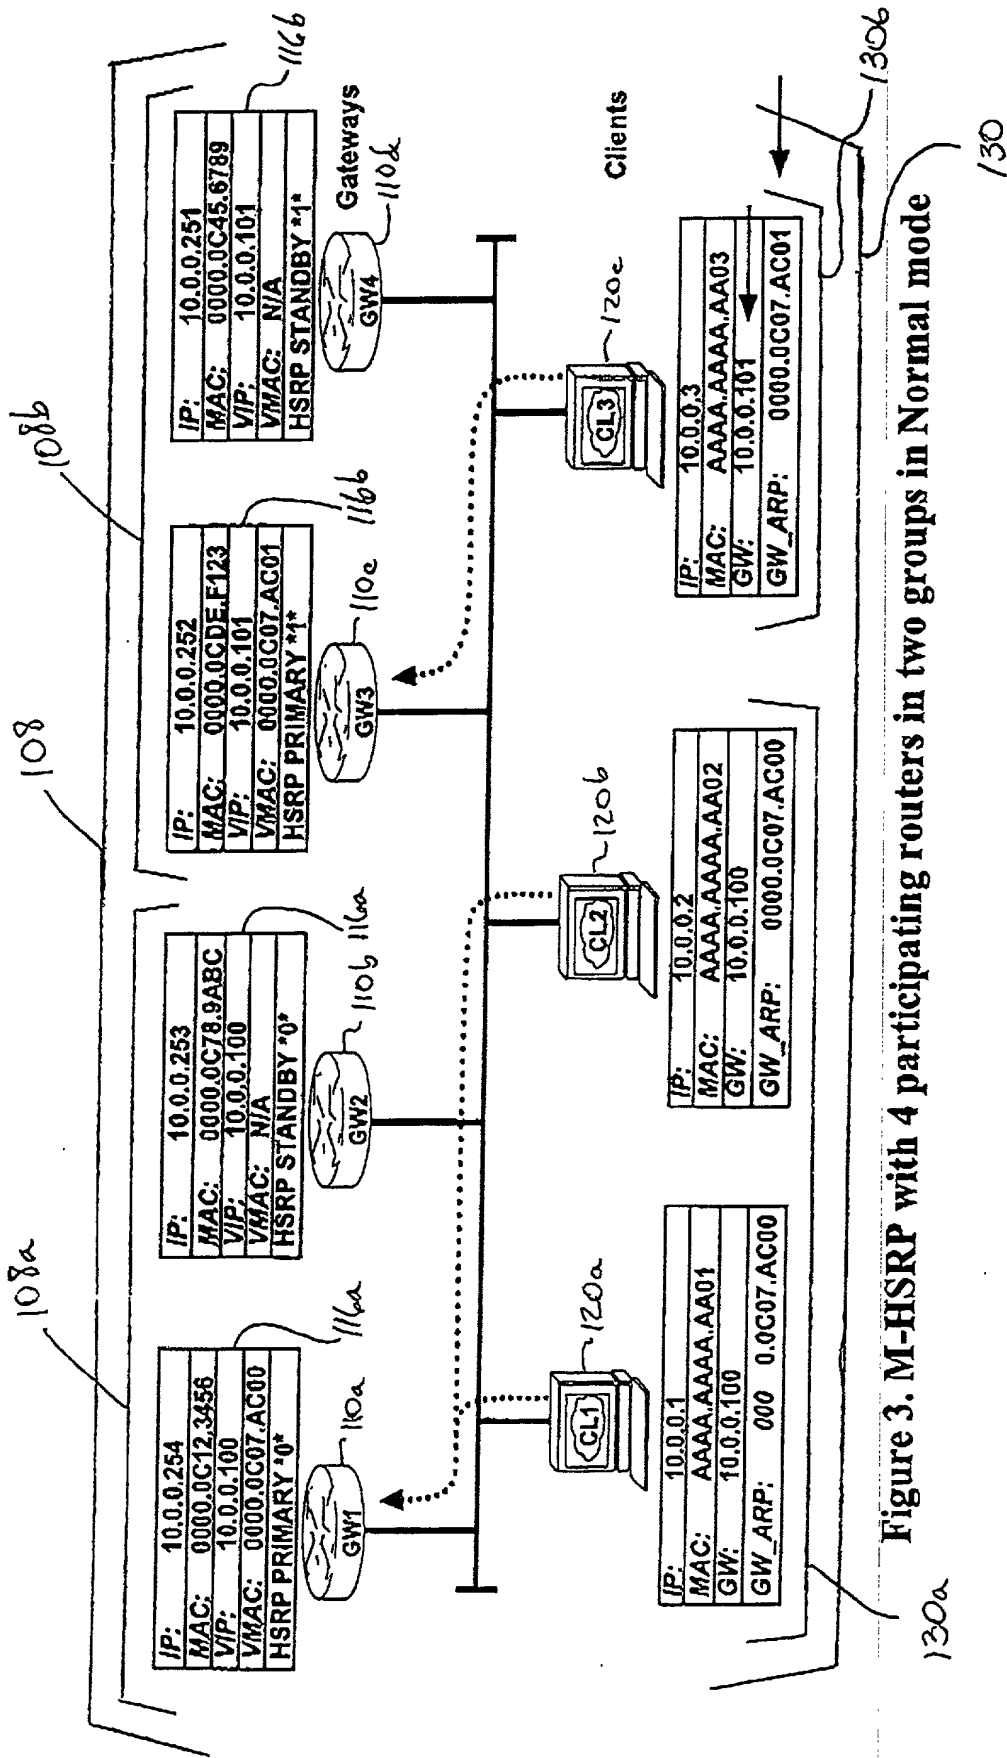


Figure 3. M-HSRP with 4 participating routers in two groups in Normal mode

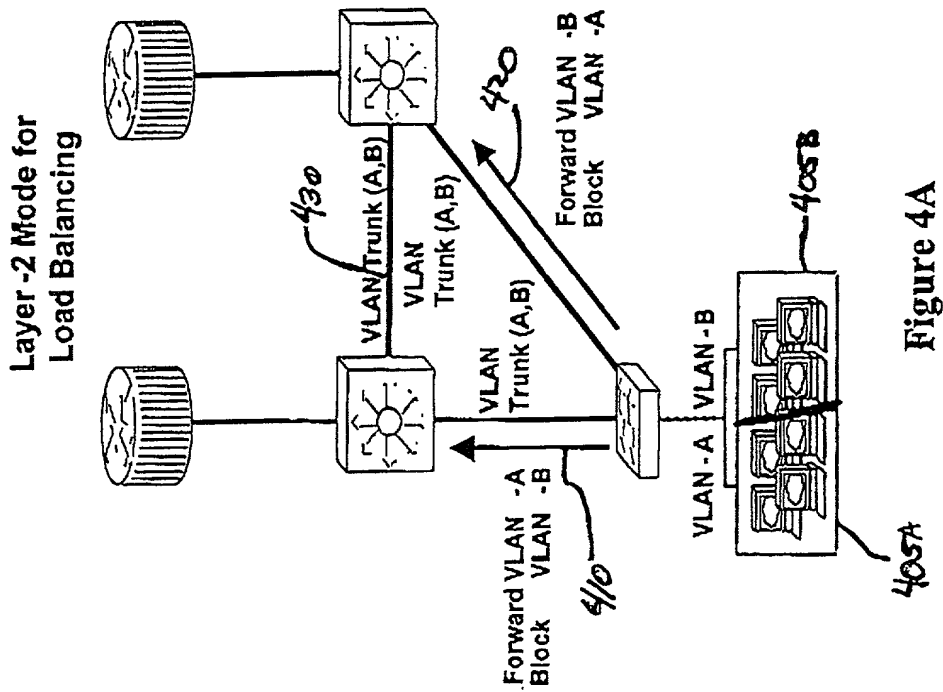


Figure 4A

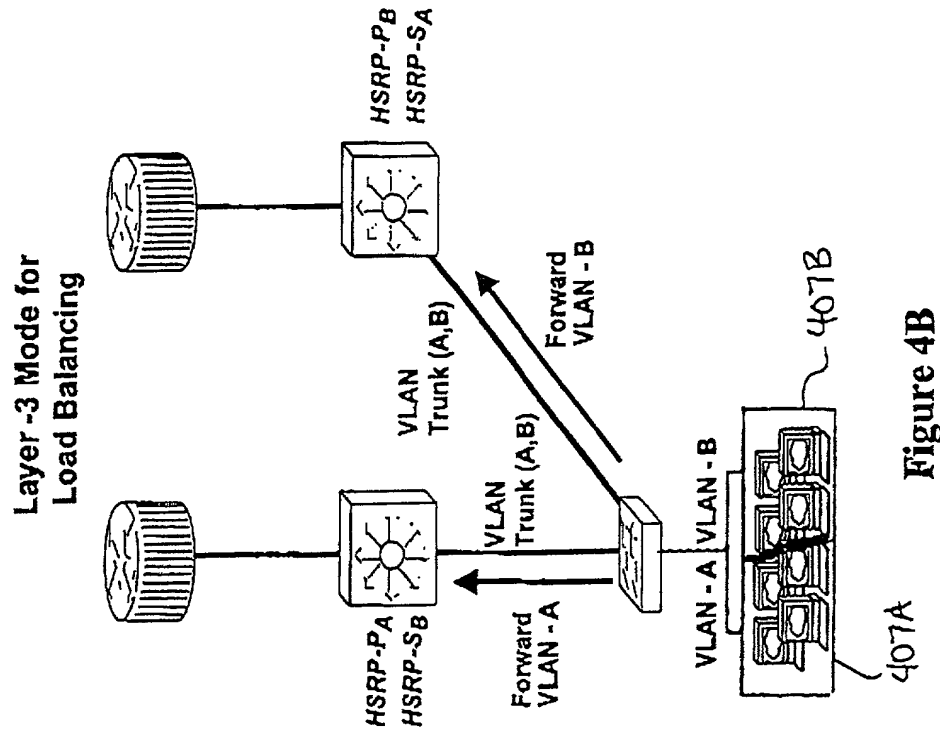


Figure 4B

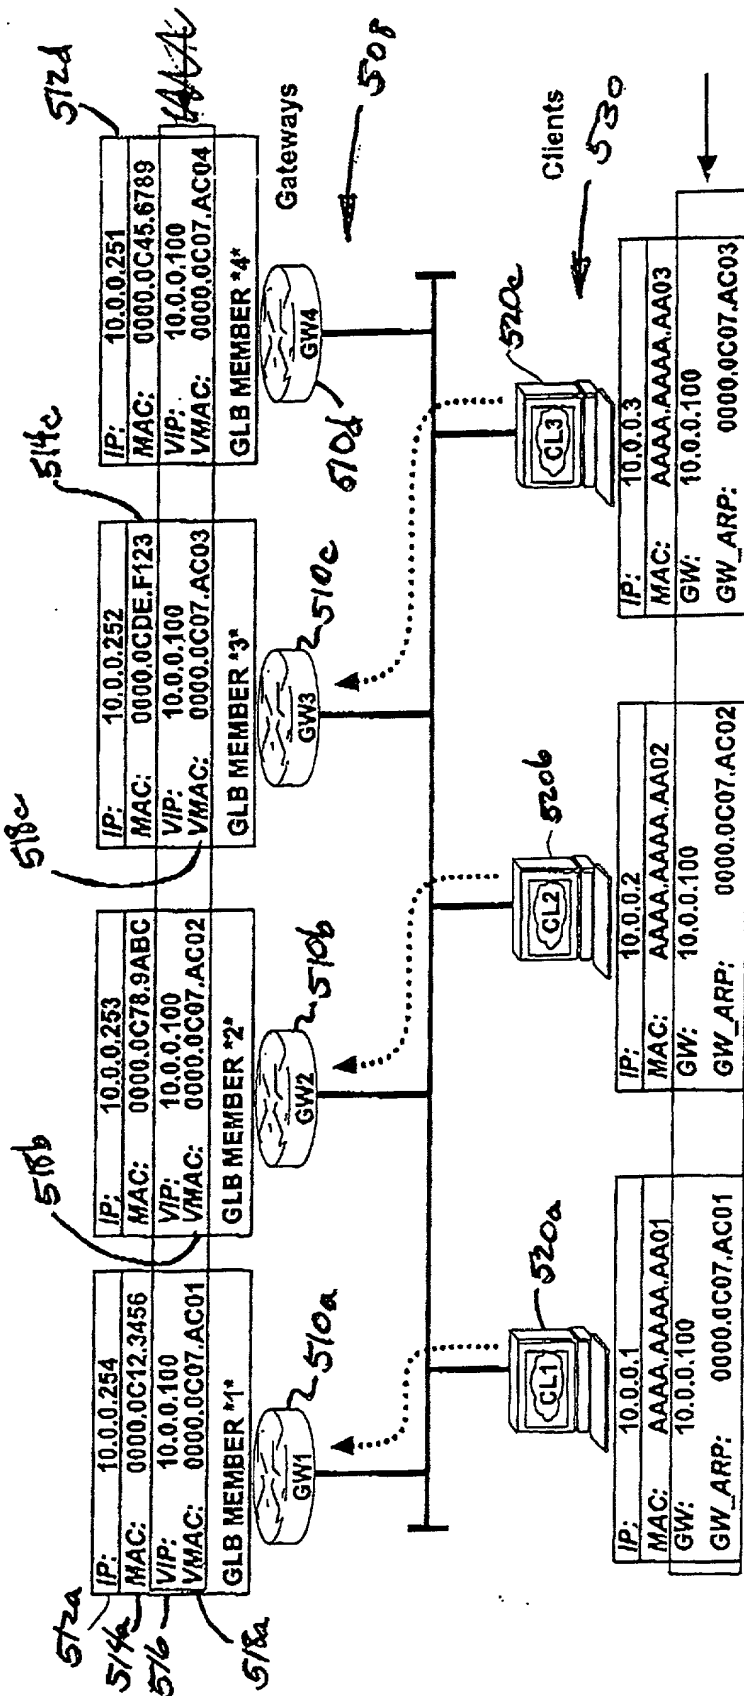


Figure 5a. GLB Service with 4 participating routers implementing load-balancing

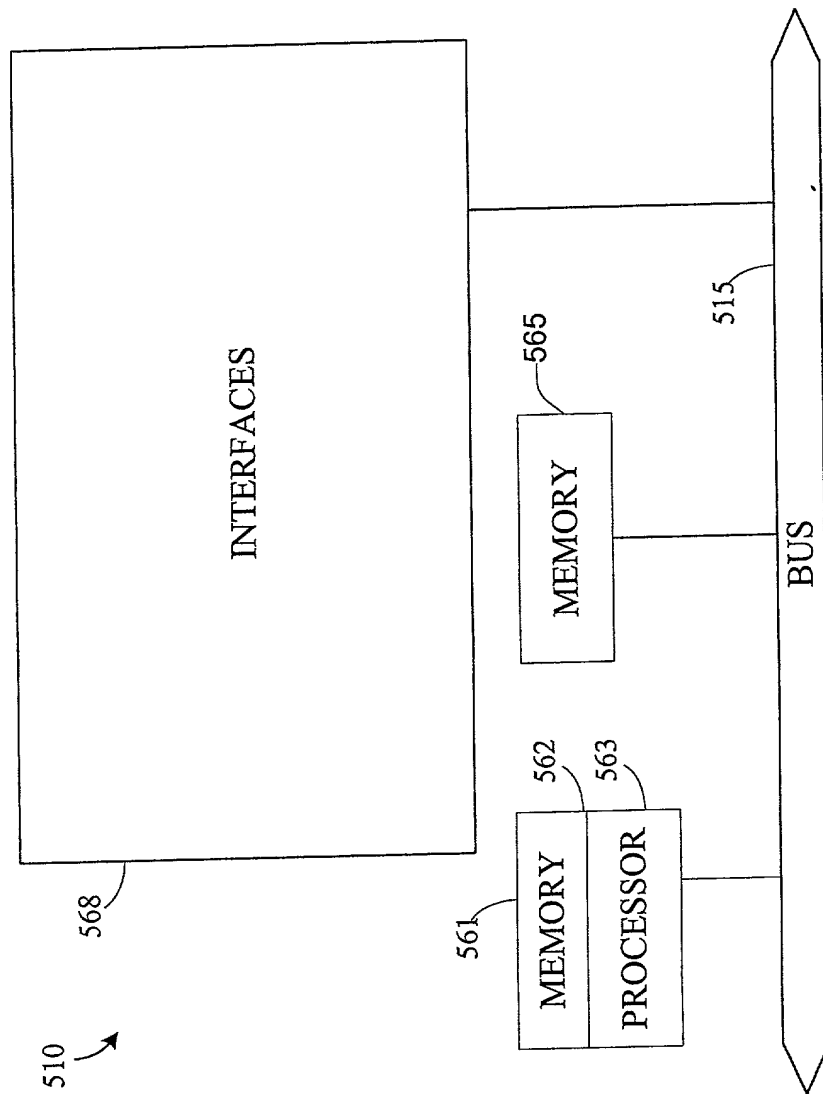


Fig. 5b

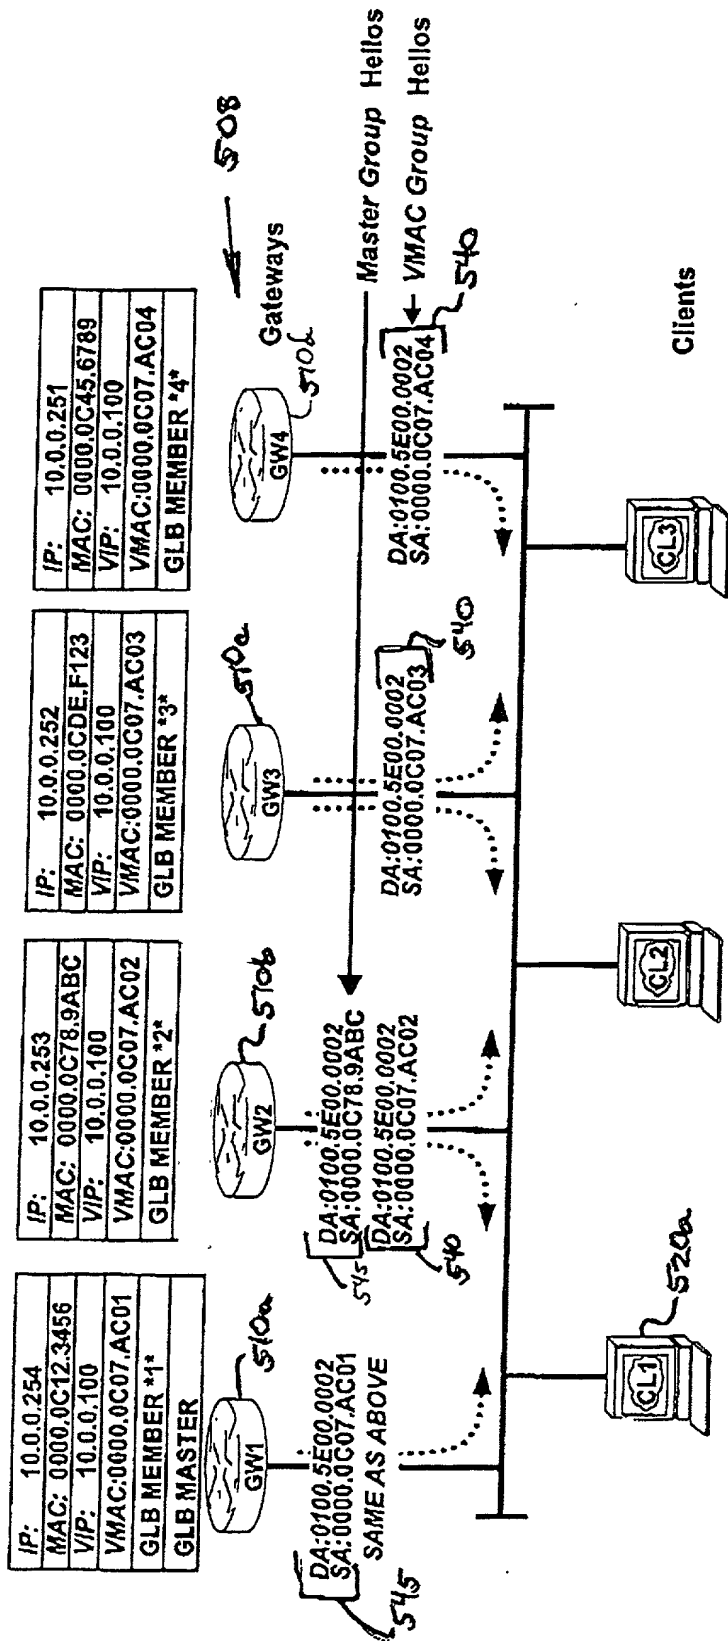


Figure 6. GLB Service hello mechanism derived from HSRP





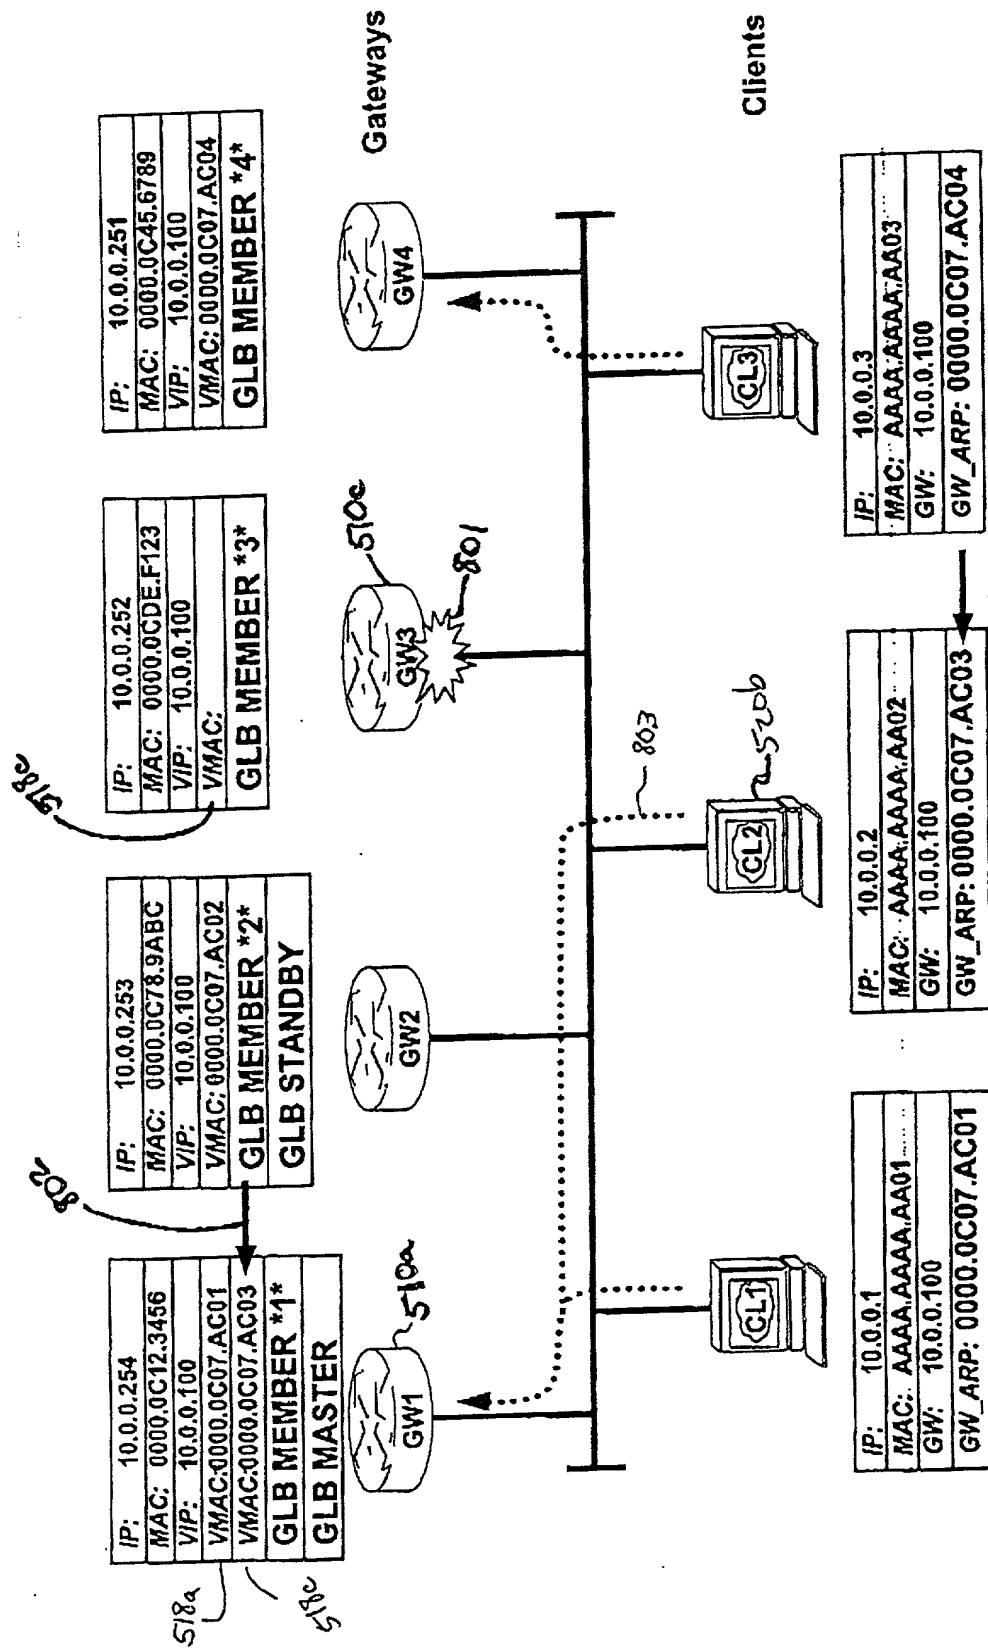
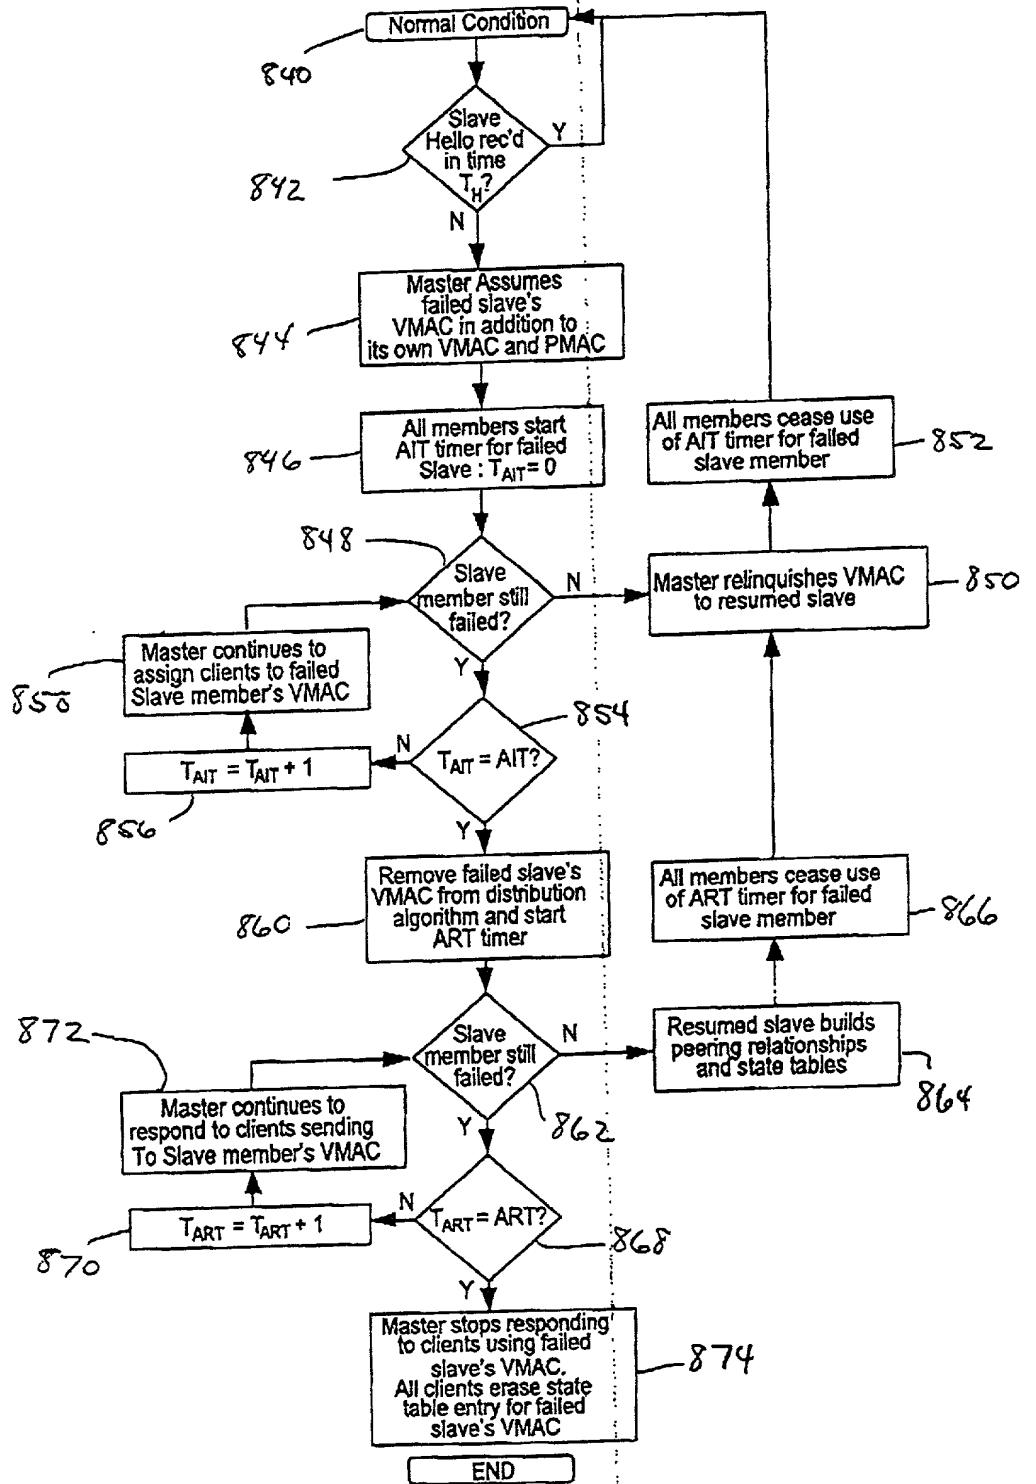


Figure 8A. Recovery of Failed Slave Member by Master

Figure 8B – Failure of a Slave Member



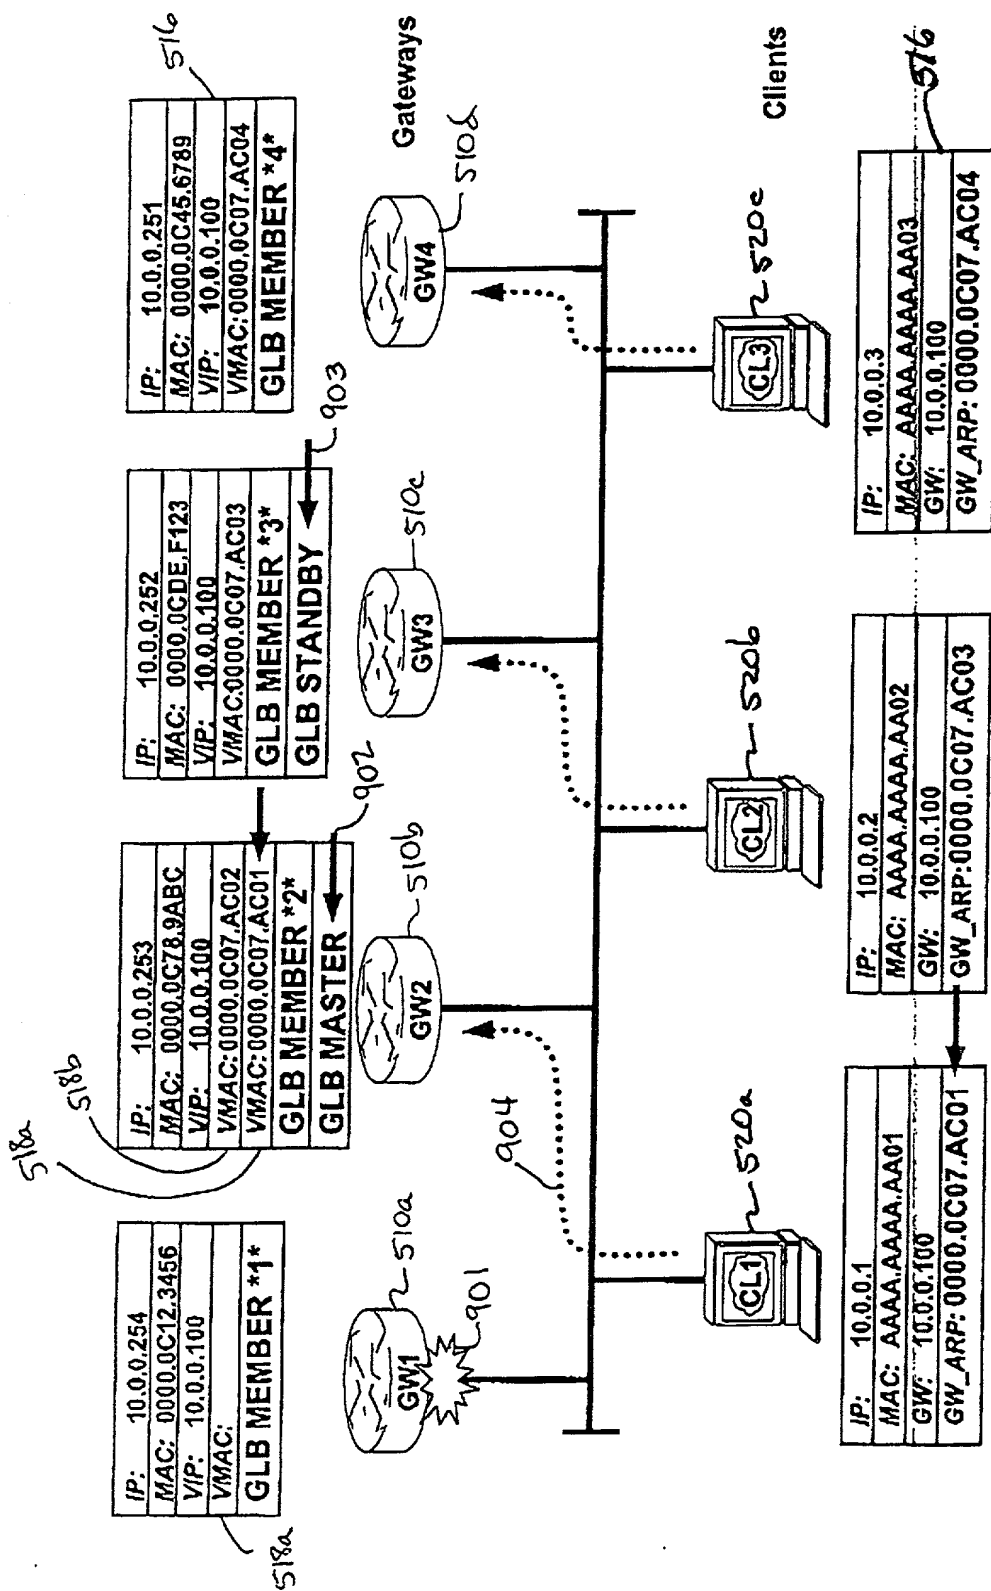


Figure 9A. Recovery of Failed Master Member by Next-in-Line Slave

Figure 9B – Failure of a Master Member

